


# V-710IJ

## UNIVERSAL FRICTION FEEDER®

INK JET/TABBER BASE FEEDERS

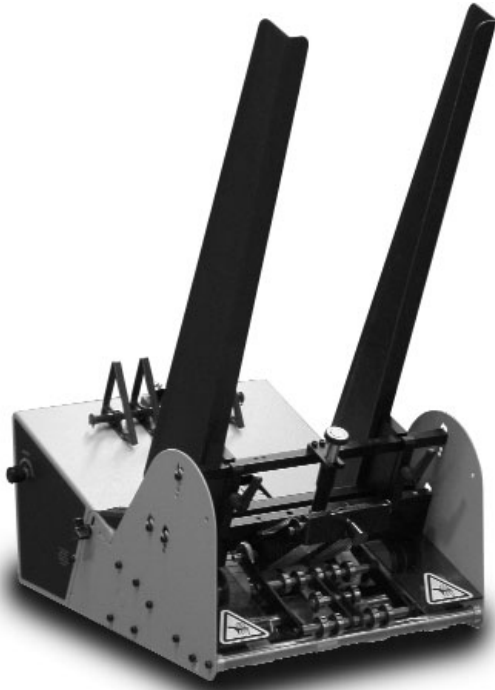

### MODEL OVERVIEW:

**SUMMARY:** Production mailing operations demand maximum throughput from their ink jet printing, labeling, and tabber bases. Whatever the brand on your shop floor - Kirk Rudy, Cheshire, Buskro, MCS, or Profold - with a V-710IJ your jobs will run at higher levels of productivity.

- APPLICATIONS:**
- Ink Jet bases.
  - Labeling bases.
  - Tabber bases.
  - Reinforcing machines.

**INCREASE PRODUCTIVITY/MAXIMIZE R.O.I.**



### THINK AUTOMATION

The lightweight V-710IJ is equipped with an integral lifting handle and non-slip mounting feet for easy moving and quick installation. Simple single knob adjustments maximize operator productivity by minimizing setup and changeover time. A large 24-inch (60.96 cm) capacity hopper reduces reloading for even greater efficiency.

Variable speed control allows operators to synchronize feed performance. An optional external run input provides the added convenience of integrated start/stop control.

### STANDARD FEATURES

- Patented Differential Friction Technology™ for reliable product separation.
- Feeds tall stack heights of 8.5 x 11-inch and A4 size flat sheets with ease.
- No-slip mounting feet for easy installation.
- Adjustable feed belts for added feeding performance.
- Quality precision parts and durable lightweight construction for long trouble-free operating life.
- Advancing gate enables operators to perform maintenance without stopping a job.
- Optional external run input for integrated start/stop control.

### SPECIFICATIONS

<b>Maximum Product Size:</b> .....	12 in. W x 12 in. L (30.48 cm x 30.48 cm)
<b>Minimum Product Size:</b> .....	3 ¾ in. W x 3 ¼ in. L (9.53 cm x 9.53 cm)
<b>Optional:</b> .....	2 ½ in. W x 2 ½ in. L (6.35 cm x 6.35 cm)
<b>Thickness:</b> .....	.003 in. to .750 in. (.07 mm x 19.1 mm)
<b>Optional:</b> .....	.003 in. to 1 in. (.07 mm x 25.4 mm)
<b>Productivity:</b> .....	Up to 56,000 #10 envelopes/hour
<b>Power Input:</b> .....	115/230vac, 50/60Hz
<b>Current:</b> .....	In-Rush: 10A Steady: 3A
<b>Construction:</b> .....	Powder coated Cold-rolled steel Hinged enclosure
<b>Overall Dimensions:</b> .....	18 1/2 in. L (47.23 cm) 26 1/2 in. H (67.39 cm) 14 25/32 in. W (37.54 cm)
<b>Weight:</b> .....	41 lbs (18.60 kg)
<b>Warranty:</b> .....	Two-year limited (90-days on motor)

**Streamfeeder**

**STREAMFEEDER LLC**

103 OSBORNE ROAD  
MINNEAPOLIS, MINNESOTA 55432-3131